


GAUGES



EGA Master's feeler gauges have been designed for the most demanding professionals to verify dimensions with a tight tolerance in the machining of the units.

Made of tempered steel. In addition to feeler gauges EGA Master also has available a range of nozzle gauges, radius gauges, angle gauges, screw pitch gauges...

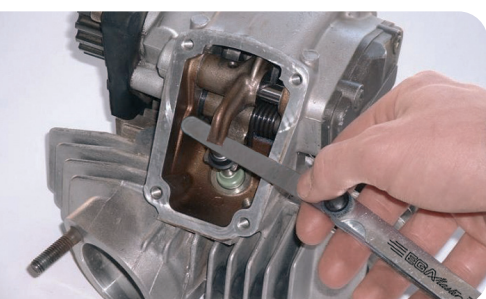

FEELER GAUGE

MM / INCH

COD.	No. Blades	Range (mm)	Range (inch)	L (mm)	9	
65550	8	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5	0,002"-0,004"-0,006"-0,008"-0,010"-0,012"-0,016"-0,020"	80		
65552	20	0,05-0,1-0,15-0,2-0,25-0,3-0,35-0,4-0,45-0,5-0,55-0,6-0,65-0,7-0,75-0,8-0,85-0,9-0,95-1,00	0,002"-0,004"-0,006"-0,008"-0,010"-0,012"-0,014"-0,016"-0,018"-0,020"-0,022"-0,024"-0,026"-0,028"-0,030"-0,032"-0,034"-0,036"-0,038"-0,040"	150 125		
65553	8	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5	0,002"-0,004"-0,006"-0,008"-0,010"-0,012"-0,016"-0,020"	70		
65554	13	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5-0,6-0,7-0,8-0,9-1,00	0,002"-0,004"-0,006"-0,008"-0,010"-0,012"-0,016"-0,020"-0,024"-0,028"-0,032"-0,036"-0,04"	90 200		
65555	20	0,05-0,1-0,15-0,2-0,25-0,3-0,35-0,4-0,45-0,5-0,55-0,6-0,65-0,7-0,75-0,8-0,85-0,9-0,95-1,00	0,002"-0,004"-0,006"-0,008"-0,010"-0,012"-0,014"-0,016"-0,018"-0,020"-0,022"-0,024"-0,026"-0,028"-0,030"-0,032"-0,034"-0,036"-0,038"-0,040"	155	6	
65556	8	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5	0,002"-0,004"-0,006"-0,008"-0,010"-0,012"-0,016"-0,020"	100		
65557	13	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5-0,6-0,7-0,8-0,9-1,00	0,002"-0,004"-0,006"-0,008"-0,010"-0,012"-0,016"-0,020"-0,024"-0,028"-0,032"-0,036"-0,04"	175 300		
65558	20	0,05-0,1-0,15-0,2-0,25-0,3-0,35-0,4-0,45-0,5-0,55-0,6-0,65-0,7-0,75-0,8-0,85-0,9-0,95-1,00	0,002"-0,004"-0,006"-0,008"-0,010"-0,012"-0,014"-0,016"-0,018"-0,020"-0,022"-0,024"-0,026"-0,028"-0,030"-0,032"-0,034"-0,036"-0,038"-0,040"	300		



FEATURES

Hardened steel

PRECISION FEELER GAUGE

MM / INCH

COD.	No. Blades	Range (mm)	Range (inch)	L (mm)		
65559	8	0,03-0,04-0,05-0,06-0,07-0,08-0,09-0,1	0,0012"-0,0016"-0,002"-0,0024"-0,0028"-0,0032"-0,0036"-0,004"	20		
65560		0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5	0,002"-0,004"-0,006"-0,008"-0,010"-0,012"-0,016"-0,02"			
65562	10	0,1-0,2-0,3-0,4-0,5-0,6-0,7-0,8-0,9-1,00	0,004"-0,008"-0,012"-0,016"-0,02"-0,024"-0,028"-0,032"-0,036"-0,04"	30		
65565	18	0,05-0,06-0,07-0,08-0,09-0,1-0,15-0,2-0,25-0,3-0,35-0,4-0,5-0,6-0,7-0,8-0,9-1,0	0,002"-0,0024"-0,0028"-0,0032"-0,0036"-0,004"-0,006"-0,008"-0,010"-0,012"-0,014"-0,016"-0,02"-0,024"-0,028"-0,032"-0,036"-0,04"	80		
65568	21	0,10-0,12-0,14-0,16-0,18-0,2-0,22-0,24-0,26-0,28-0,3-0,32-0,34-0,36-0,38-0,4-0,42-0,44-0,46-0,48-0,5	0,004"-0,0048"-0,0056"-0,0064"-0,0072"-0,0080"-0,0088"-0,0096"-0,0104"-0,0112"-0,0120"-0,0128"-0,0136"-0,0144"-0,0152"-0,0160"-0,0168"-0,0176"-0,0184"-0,0192"-0,02"	100	6	
65569		0,05-0,1-0,2-0,3-0,4-0,5-0,6-0,7-0,8-0,9-1,00-1,1-1,2-1,3-1,4-1,5-1,6-1,7-1,8-1,9-2,00	0,002"-0,004"-0,008"-0,012"-0,016"-0,02"-0,024"-0,028"-0,032"-0,036"-0,040"-0,044"-0,048"-0,052"-0,056"-0,060"-0,064"-0,068"-0,072"-0,076"-0,080"	100		
65570	32	0,03-0,04-0,05-0,06-0,07-0,075-0,08-0,09-0,1-0,12-0,15-0,18-0,2-0,22-0,25-0,28-0,3-0,32-0,35-0,4-0,45-0,5-0,55-0,6-0,65-0,7-0,75-0,8-0,85-0,9-0,95-1,00	0,0012"-0,0016"-0,002"-0,0024"-0,0028"-0,0032"-0,0036"-0,004"-0,0048"-0,006"-0,0072"-0,008"-0,0088"-0,010"-0,0112"-0,0120"-0,0128"-0,014"-0,0152"-0,016"-0,018"-0,02"-0,022"-0,024"-0,026"-0,028"-0,030"-0,032"-0,034"-0,036"-0,038"-0,040"	210		



FEATURES

Hardened steel

With lock nut

NOZZLE GAUGES


COD.	No. Blades	Range (mm)		
65776	20	0,45-0,50-0,55-0,60-0,65-0,70-0,75-0,80-0,85-0,90-0,95-1,00-1,05-1,10-1,15-1,20-1,25-1,30-1,40-1,50	20	6
65777	16	1,50-1,60-1,70-1,80-1,90-2,00-2,10-2,20-2,30-2,40-2,50-2,60-2,70-2,80-2,90-3,00		
65778		3,00-3,10-3,20-3,30-3,40-3,50-3,60-3,70-3,80-3,90-4,0-4,10-4,20-4,30-4,40-4,50		
65779		4,50-4,60-4,70-4,80-4,90-5,00-5,10-5,20-5,30-5,40-5,50-5,60-5,70-5,80-5,90-6,00		



RADIUS GAUGES

MM

COD.	No. Blades	Range (mm)		
65578	17	1-1,25-1,5-1,75-2-2,25-2,5-2,75-3-3,5-4-4,5-5-5,5-6-6,5-7	65	6
65579	16	7,5-8-8,5-9-9,5-10-10,5-11-11,5-12-12,5-13-13,5-14-14,5-15	100	
65580	15	15,5-16-16,5-17-17,5-18-18,5-19-19,5-20-21-22-23-24-25	110	

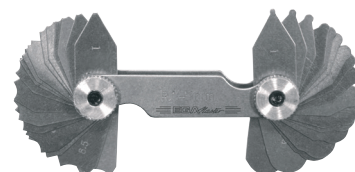


FEATURES

Hardened steel

INCH

COD.	No. Blades	Range (inch)		
65581	15	1/32"-3/64"-1/16"-5/64"-3/32"- 7/64"-1/8"-9/64"-5/32"-11/64"- 3/16"-13/64"-7/32"-16/64"-1/4"	110	
65582	16	17/64"-9/32"-19/64"-5/16"-21/64"- 11/32"-23/64"-3/8"-26/64"-13/32"- 27/64"-7/16"-29/64"-15/32"- 31/64"-1/2"	100	6
65583		17/32"-9/16"-19/32"-5/8"-21/32"- 11/16"-23/32"-3/4"-25/32"-13/16"- 27/32"-7/8"-29/32"-15/16"- 31/32"-1"		

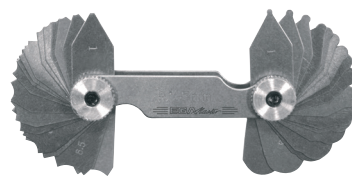

FEATURES


Hardened steel

ANGLE GAUGES

COD.	No. Blades	Range		
65584	20	1°-2°-3°-4°-5°-6°-7°-8°-9°-10°-12°-14°-16°-18°-20°-25°-30°- 35°-40°-45°	110	6



THREAD PITCH GAUGES



MÉTRICA (ISO) 60°
&
WHITWORTH 55°

COD.	No. Blades	P (mm)		
65571	24	0,25-0,30-0,35-0,40-0,45-0,5-0,6- 0,7-0,75-0,8-0,9-1,0-1,25-1,5-1,75- 2,0-2,5-3,0-3,5-4,0-4,5-5,0-5,5-6,0	40	6



FEATURES

Hardened steel

TECHNICAL SPECIFICATION

Screwtype

Metric 60°

COD.	No. Blades	TPI		
65572	28	4-4,1/2-5-6-7-8-9-10-11-12-13-14-16-18-19-20-22-24-25-26-28-30-32-36-40-48-60-62	42	
65574	30	4,0-4,5-5,0-5,5-6,0-7,0-8,0-9,0-10-11-11,5-12-13-14-15-16-18-20-22-24-26-27-28-30-32-34-36-38-40-42	50	6
65575		6,0-7,0-8,0-9,0-10-11-11,5-12-13-14-15-16-18-20-22-24-26-27-28-30-32-34-36-38-40-42-44-46-48-50-56-60		

FEATURES

Hardened steel

TECHNICAL SPECIFICATION

Screwtype Whitworth 55°


COD.	No. Blades	P (mm)	TPI		
65561	52	0,25 - 0,30 - 0,35 - 0,40 - 0,45 - 0,5 - 0,6 - 0,7 - 0,75 - 0,8 - 0,9 - 1,0 - 1,25 - 1,5 - 1,75 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0	4 - 4,1/2 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 16 - 18 - 19 - 20 - 22 - 24 - 25 - 26 - 28 - 30 - 32 - 36 - 40 - 48 - 60 - 62	100	6

FEATURES

Hardened steel

TECHNICAL SPECIFICATION

Screwtype Metric 60° / Whitworth 55°



ACME (DIN) 29°
&
ACME 30°

COD.	No. Blades	P (mm)		
65576	12	2-3-4-5-6-7-8-9-10-12-16-20	250	6

FEATURES

Hardened steel

TECHNICAL SPECIFICATION

Screwtype ACME 30°



COD.	No. Blades	TPI		
65577	16	1-1,1/3-1,1/2-1,3/4-2-2,1/2-3-3,1/2-4-5-6-7-8-9-10-12	30	6

FEATURES

Hardened steel

TECHNICAL SPECIFICATION

Screwtype ACME (DIN) 29°