


ADJUSTABLE WRENCHES

EGA Master manufactures the widest range of adjustable wrenches in the world, available in multiple sizes, versions and with unique innovations. The rugged design makes an Adjustable Wrench ideal for heavy duty applications with its high resistance when tightening.



TITACROM®

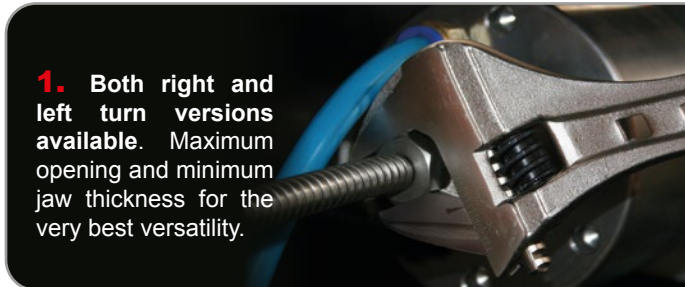



1. Both right and left turn versions available. Maximum opening and minimum jaw thickness for the very best versatility.

2. Available in a Titacrom or phosphated finish.

3. Available with or without a Bi-material Anti-slip Comfort Grip Handle for maximum comfort and user appeal.

4. Also available with 1000V insulation.

TITACROM



COD.	L (inch)	L (mm)	*lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
61109	4	100	600	13	34	13	5,5	70	12	
61110	6	150	1450	20	47	19	6,5	150		
61111	8	200	2700	25	55	24	7	280	10	•
61112	10	250	4500	30	70	29	8,5	500		
61113	12	300	7650	35	85	33	10	850	8	

TITACROM® | Registered model | GGG-W-631B. ANSI B-107.8M



COD.	L (inch)	L (mm)	*lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
61114	15	380	15000	44	105	45	13	1200		
61115	18	450	20000	50	120	55	14	2000		
61116	24	600	25000	60	180	60	15	3100	1	•
62980	30	750	27500	75	180	85	17	5600		-



TITACROM® | Registered model | GGG-W-631B. ANSI B-107.8M

TECHNICAL SPECIFICATION

MATERIAL	Special Steel
HARDNESS	40-50 HRC.
FINISHING	Titacrom®

lb.in Minimum bending test torque according to ANSI B 107.8 standard

TITACROM COMFORT



COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
61906	6	150	1450	20	47	19	6,5	180		
61907	8	200	2700	25	55	24	7	330		
61908	10	250	4500	30	70	29	8,5	600	6	•
61909	12	300	7650	35	85	33	10	900		

TITACROM® COMFORT | Registered model | GGG-W-631B. ANSI B-107.8M





COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
61370	15	375	15000	44	105	45	13	1250		
61371	18	450	20000	50	120	55	14	2050	1	•
61372	24	600	25000	60		62	15	3150		

TITACROM® COMFORT | Registered model | GGG-W-631B. ANSI B-107.8M

TECHNICAL SPECIFICATION

MATERIAL	Wrench	Special Steel
	Handle	PVC
HARDNESS	40-50 HRc.	
FINISHING	Wrench	Titacrom®
	Handle	Black

TITACROM 1000V




COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
76550	6	150	1450	20	47	19	6,5	200		
76551	8	200	2700	25	55	24	7	360		
76552	10	250	4500	30	70	29	8,5	600	4	•
76553	12	300	7650	35	85	33,5	10	950		

TITACROM® 1000V | IEC 60900 | Registered model | GGG-W-631B. ANSI B-107.8M

TECHNICAL SPECIFICATION

MATERIAL	Wrench	Special Steel
	Handle	PVC
HARDNESS	40-50 HRc.	
FINISHING	Wrench	Titacrom®
	Handle	Orange RAL 2011 and black

PHOSPHATED



COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
61136	4	100	600	13	34	13	5,5	70	12	
61117	6	150	1450	20	47	19	6,5	160		
61118	8	200	2700	25	55	24	7	310	10	●
61119	10	250	4500	30	70	29	8,5	550		
61120	12	300	7650	35	85	33	10	850	8	

Registered model | GGG-W-631B. ANSI B-107.8M




COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
61121	15	375	15000	44	105	45	13	1200		
61122	18	450	20000	50	120	55	14	2000	1	●
61123	24	600	25000	60	120	62	15	3100		

Registered model | GGG-W-631B. ANSI B-107.8M

TECHNICAL SPECIFICATION

MATERIAL	Special Steel
HARDNESS	40-50 HRC.
FINISHING	Phosphated

PHOSPHATED COMFORT



COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
61898	6	150	1450	20	47	19	6,5	180		
61910	8	200	2700	25	55	24	7	330		
61911	10	250	4500	30	70	29	8,5	600	6	●
61912	12	300	7650	35	85	33	10	900		

COMFORT | Registered model | GGG-W-631B. ANSI B-107.8M




COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
61373	15	375	15000	44	105	45	13	1250		
61374	18	450	20000	50	120	55	14	2050	1	●
61375	24	600	25000	60	120	60	15	3150		

COMFORT | Registered model | GGG-W-631B. ANSI B-107.8M

TECHNICAL SPECIFICATION

MATERIAL	Wrench	Special Steel
	Handle	PVC
HARDNESS	40-50 HRC.	
FINISHING	Wrench	Phosphated
	Handle	Black

PHOSPHATED 1000V



COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
76554	6	150	1450	20	47	19	6,5	195		
76555	8	200	2700	25	55	24	7	370		
76556	10	250	4500	30	70	29	8,5	650	4	●
76557	12	300	7650	35	85	33	10	1050		


1000V | IEC 60900 | Registered model | GGG-W-631B. ANSI B-107.8M

TECHNICAL SPECIFICATION

MATERIAL	Wrench	Special Steel
	Handle	PVC
HARDNESS	40-50 HRc.	
FINISHING	Wrench	Phosphated
	Handle	Orange RAL 2011 and black

SCANDINAVIAN TYPE PHOSPHATED

LEFT TURN



COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
60550	6	150	1450	20	47	19	6,5	160		
60552	10	250	4500	30	70	29	8,5	550	10	●
60553	12	300	7650	35	85	33,5	10	850	8	


Registered model | SCANDINAVIAN - LEFT TURN | GGG-W-631B. ANSI B-107.8M

TECHNICAL SPECIFICATION

MATERIAL	Special Steel	
HARDNESS	40-50 HRc.	
FINISHING	Phosphated	

SCANDINAVIAN TYPE PHOSPHATED COMFORT

LEFT TURN




COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
60548	6	150	1450	20	47	19	6,5	180		
60558	10	250	4500	30	70	29	8,5	595	6	●
60559	12	300	7650	35	85	33	10	900		

COMFORT | Registered model | SCANDINAVIAN - LEFT TURN | GGG-W-631B. ANSI B-107.8M

SCANDINAVIAN TYPE PHOSPHATED COMFORT

LEFT TURN

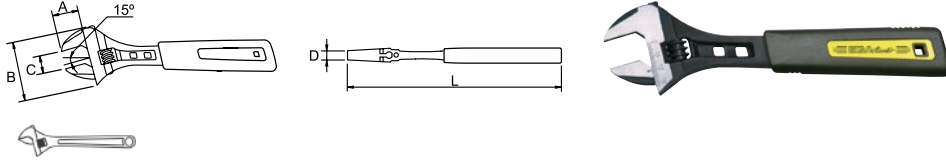

COD.	L (inch)	L (mm)	* lb.in	A (mm)	B (mm)	C (mm)	D (mm)			
60562	24	600	25000	60	120	62	15	3150	1	●

COMFORT | Registered model | SCANDINAVIAN - LEFT TURN | GGG-W-631B. ANSI B-107.8M

TECHNICAL SPECIFICATION		
MATERIAL	Wrench	Special Steel
	Handle	PVC
HARDNESS	40-50 HRc.	
FINISHING	Wrench	Phosphated
	Handle	Black